


**Fural**  
Rv 3,0-20%

Perforation  $\varnothing$  3,0 mm  
Share of holes 20 %  
Max. perforation exterior size 1.402 mm  
Max. tool width roll size 1.500 mm  
Max. material thickness steel 0,70 mm  
Max. material thickness alu 1,00 mm  
DIN 24041 Designation Rv 3,00-6,35  
Distance horizontal 6,50 mm →  
Distance vertical 5,50 mm ↓  
Offset spacing 60° 6,39 mm ↘  
Direction of perforation: →

**Sound absorption**

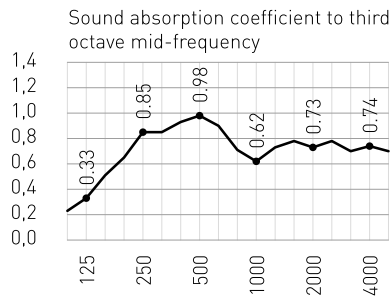

Frequency	Third value	Octave value
100	0,23	
125	0,33	0,35
160	0,51	
200	0,65	
250	0,85	0,80
315	0,85	
400	0,93	
500	0,98	0,95
630	0,90	
800	0,71	
1000	0,62	0,70
1250	0,73	
1600	0,78	
2000	0,73	0,75
2500	0,78	
3150	0,70	
4000	0,74	0,70
5000	0,70	

Air gap 200 mm  
Acoustic fleece Acoustic-Fleece, glued in  
Test certificate P-BA 221/2007 Bild 2  
NRC 0,80  
 $\alpha_w$  0,75 (L)  
Absorber class C (DIN EN 11654)  
Support without